

Submersible Sump Pump

Part Number: BTRPH50-110V

SUMP PUMP DESCRIPTION

This submersible pump is equipped with an 8-ft long, 3 prong grounding type power cord. Motor is oil filled and sealed for cooler running and designed to operate under water. Included with purchase: Float switch for automatic pump operation, Check Valve, Vertical Float, and Lid. This pump is not suitable for aquatic life.


SPECIFICATIONS

Features: Weight 21lbs.; Max. 70 GPM; 25ft. Max. Lift

Motor: 1/2 HP, 110-115 V, 60 Hz

UNPACKING

Inspect this unit before it is used. Occasionally, products are damaged during shipment. If the pump or components are damaged, return the unit to the place of purchase for replacement, or call Customer Support 337-330-4407.

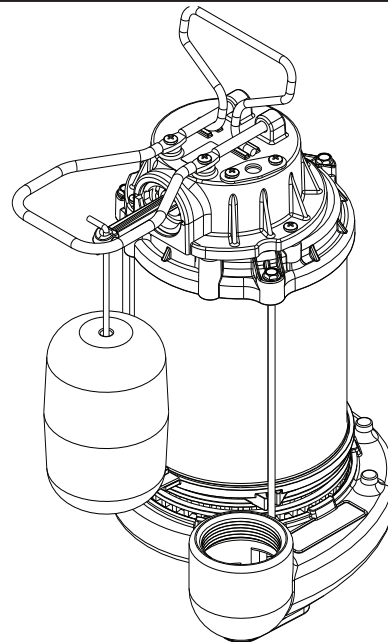

IMPORTANT SAFETY INFORMATION

⚠ WARNING

WARNING INDICATES A POTENTIALLY HAZARDOUS SITUATION WHICH, IF NOT AVOIDED, COULD RESULT IN DEATH OR SERIOUS INJURY.

RISK OF ELECTRIC SHOCK. TO REDUCE THIS RISK, MAKE SURE THERE IS A PROPERLY GROUNDED RECEPTACLE AVAILABLE.

This pump is supplied with a grounding conductor and grounding-type attachment plug. To reduce the risk of electric shock, be certain that it is connected only to a properly grounded, grounding-type receptacle.



FOR ADDED SAFETY the receptacle must be protected with a ground fault circuit interrupter (GFCI). All wiring must be performed by a qualified licensed electrician and comply with the National Electric Code and all applicable local codes and ordinances.

NEVER REMOVE THE GROUND PRONG from the plug or bypass the grounding wires.

MAKE SURE THE POWER SUPPLY HAS A FUSE OR CIRCUIT BREAKER rated to handle the current (amps) noted on the pump nameplate or cordtag.

DO NOT REMOVE POWER SUPPLY CORD and strain relief or connect conduit directly to the pump.

DO NOT WALK on the floor when water is present until all power is turned off. If the electric panel is in the basement, call an electrician.

NEVER HANDLE A PUMP or motor with wet hands or when standing on a wet or damp floor while the pump is plugged into the power supply.

DO NOT USE TO PUMP FLAMMABLE OR EXPLOSIVE FLUIDS such as gasoline, fuel oil, kerosene, etc. Do not use in a flammable and/or explosive atmosphere. Pump should only be used to pump clear water. Personal injury and/or property damage will result and void warranty.

PUMPS ARE NOT DESIGNED TO TRANSFER WATER INTENDED FOR DRINKING. Do not use the pump for oving water that will be used for portable/drinking water. Pump should only be used in applications for which it is designed.

NOTICE

IT IS THE INSTALLER'S RESPONSIBILITY TO MAKE SURE THE PUMPS AUTOMATIC SWITCH IS ABLE TO OPERATE WITHOUT ANY OBSTRUCTIONS WITHIN THE BASIN. It is recommended that the installer test and observe the pump's operation for several cycles after installation.

IT IS REQUIRED TO USE A CHECK VALVE with this pump to prevent the back-flow of clear ground water after each pump cycle.


DO NOT LIFT OR CARRY THE PUMP BY THE POWER CORD. Use the pump's handle or lift ring.

This pump is not designed to handle salt water, brine, laundry discharge, water softener, sewage, grey water, or any other application which may contain caustic chemicals and/or foreign materials. Pump and/or property damage could occur if used in these applications and will void warranty


FOR CUSTOMER
SUPPORT, CALL
1-337-330-4407

ADDRESS CORRESPONDENCE TO:
Ahead Sanitation Systems
329 Hardware Drive
Broussard, LA 70518

TYPICAL INSTALLATION

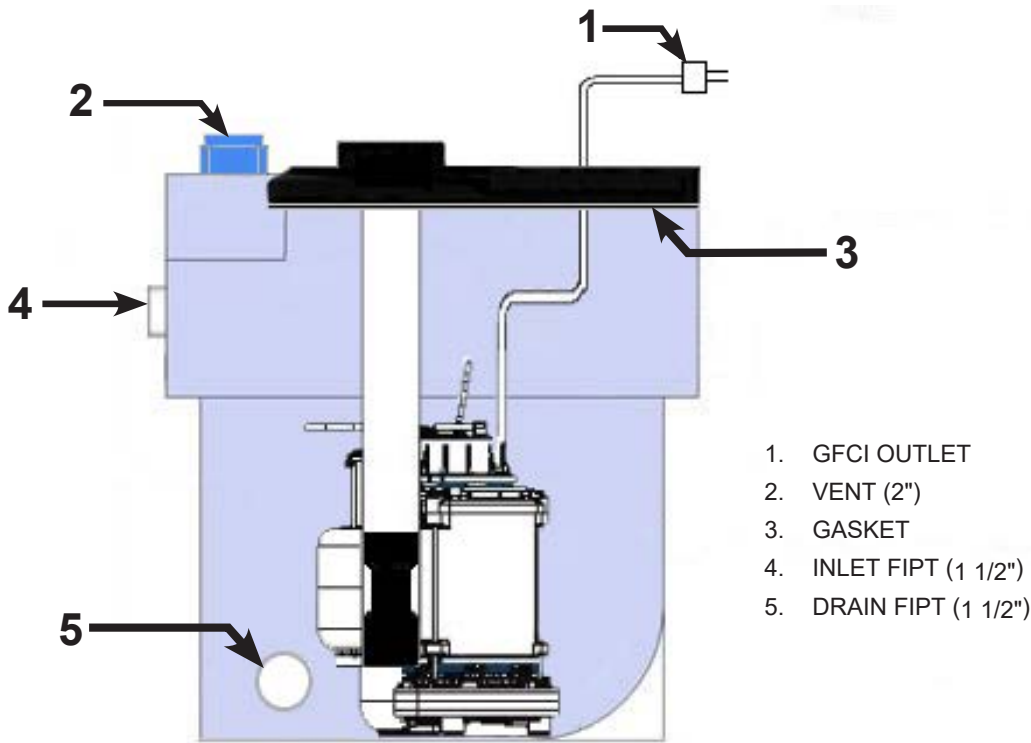

BTRPH50 PERFORMANCE

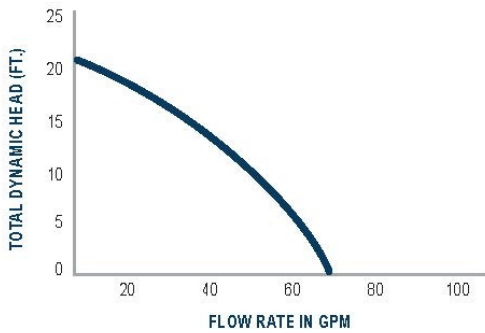

Discharge Head	5 ft.	10 ft.	15 ft.	20 ft.
GPM	58	45	28	2

